

Important Update Notice for V10

1. Network Installation Notes.....	1
2. Printer Status Monitoring	4
3. Logging Feature.....	5
4. Send File Feature.....	6


Important Update Notice for V10

1. Network Installation Notes

The V10 driver supports bidirectional communication.


Therefore, for network ports, **“Advanced Port Monitor”**

must be used instead of the “Standard TCP/IP” port that was used in V5.

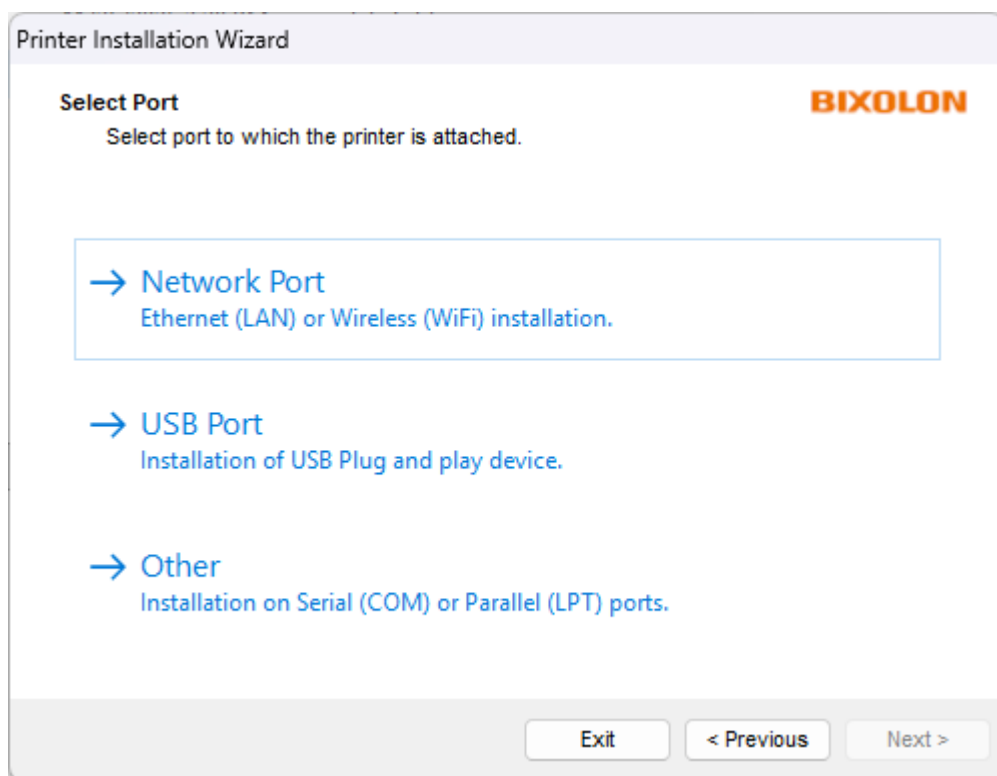

If the port does not appear in the existing port list, it means that no port configured with **Advanced Port Monitor**

is available.

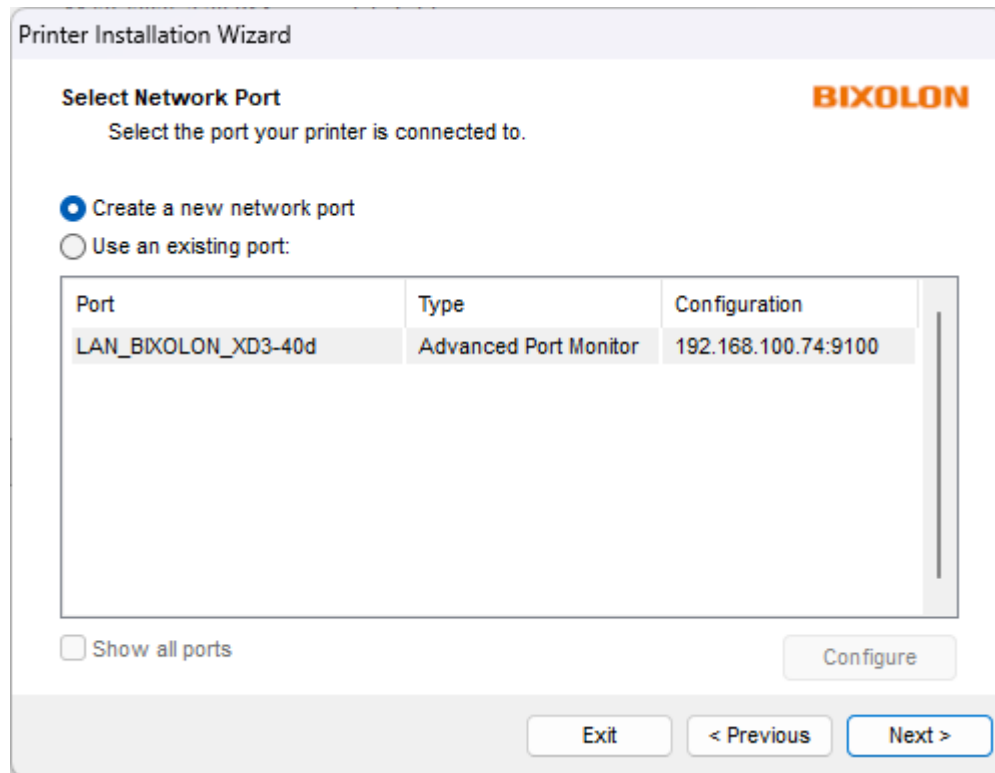

The screenshot shows the 'Printer Installation Wizard' window with the 'Select Network Port' step. The BIXOLON logo is in the top right. The instruction 'Select the port your printer is connected to.' is at the top. Two radio buttons are present: 'Create a new network port' (selected) and 'Use an existing port:'. Below is a table with one row: 'LAN_BIXOLON_XD3-40d', 'Advanced Port Monitor', and '192.168.100.74:9100'. A 'Show all ports' checkbox is at the bottom left, and a 'Configure' button is at the bottom right. Navigation buttons 'Exit', '< Previous', and 'Next >' are at the very bottom.

Printer Installation Wizard

Select Network Port

Select the port your printer is connected to.

☒ Create a new network port

☐ Use an existing port:


Port	Type	Configuration
LAN_BIXOLON_XD3-40d	Advanced Port Monitor	192.168.100.74:9100

☐ Show all ports

Configure

Exit < Previous Next >

In this case, please create a new port using “Add a new network port.”

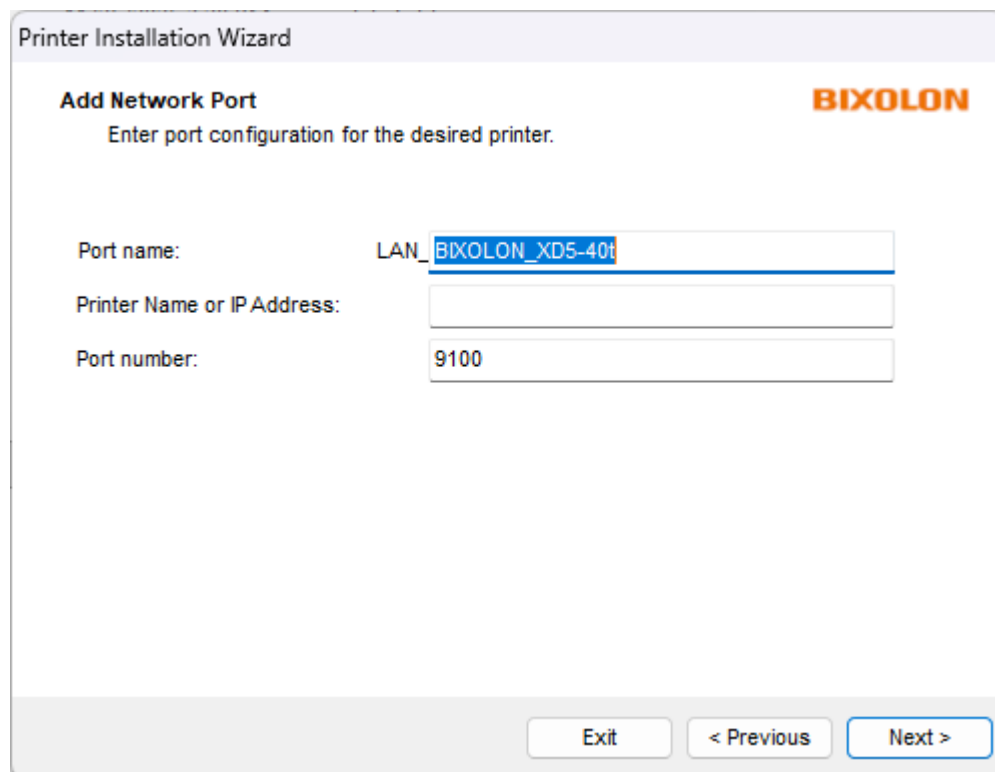

The screenshot shows the 'Printer Installation Wizard' window with the 'Add Network Port' step. The BIXOLON logo is in the top right. The instruction 'Enter port configuration for the desired printer.' is at the top. There are three input fields: 'Port name:' with 'LAN_BIXOLON_XD5-40t' (highlighted), 'Printer Name or IP Address:', and 'Port number:' with '9100'. Navigation buttons 'Exit', '< Previous', and 'Next >' are at the bottom.

Printer Installation Wizard

Add Network Port

Enter port configuration for the desired printer.

Port name: LAN_BIXOLON_XD5-40t

Printer Name or IP Address:

Port number: 9100

Exit < Previous Next >

If an **Advanced Port Monitor** port already exists, you may continue to use the existing port.

Printer Installation Wizard

Select Network Port

BIXOLON

Select the port your printer is connected to.

- ☐ Create a new network port
- ☒ Use an existing port:

Port	Type	Configuration
LAN_BIXOLON_XD3-40d	Advanced Port Monitor	192.168.100.74:9100

☐ Show all ports

Configure

Exit


< Previous

Next >

2. Printer Status Monitoring

You can change the printer status monitoring type via:

Printer Properties → Driver Settings → Settings → Printer Status → “Status Check Type”

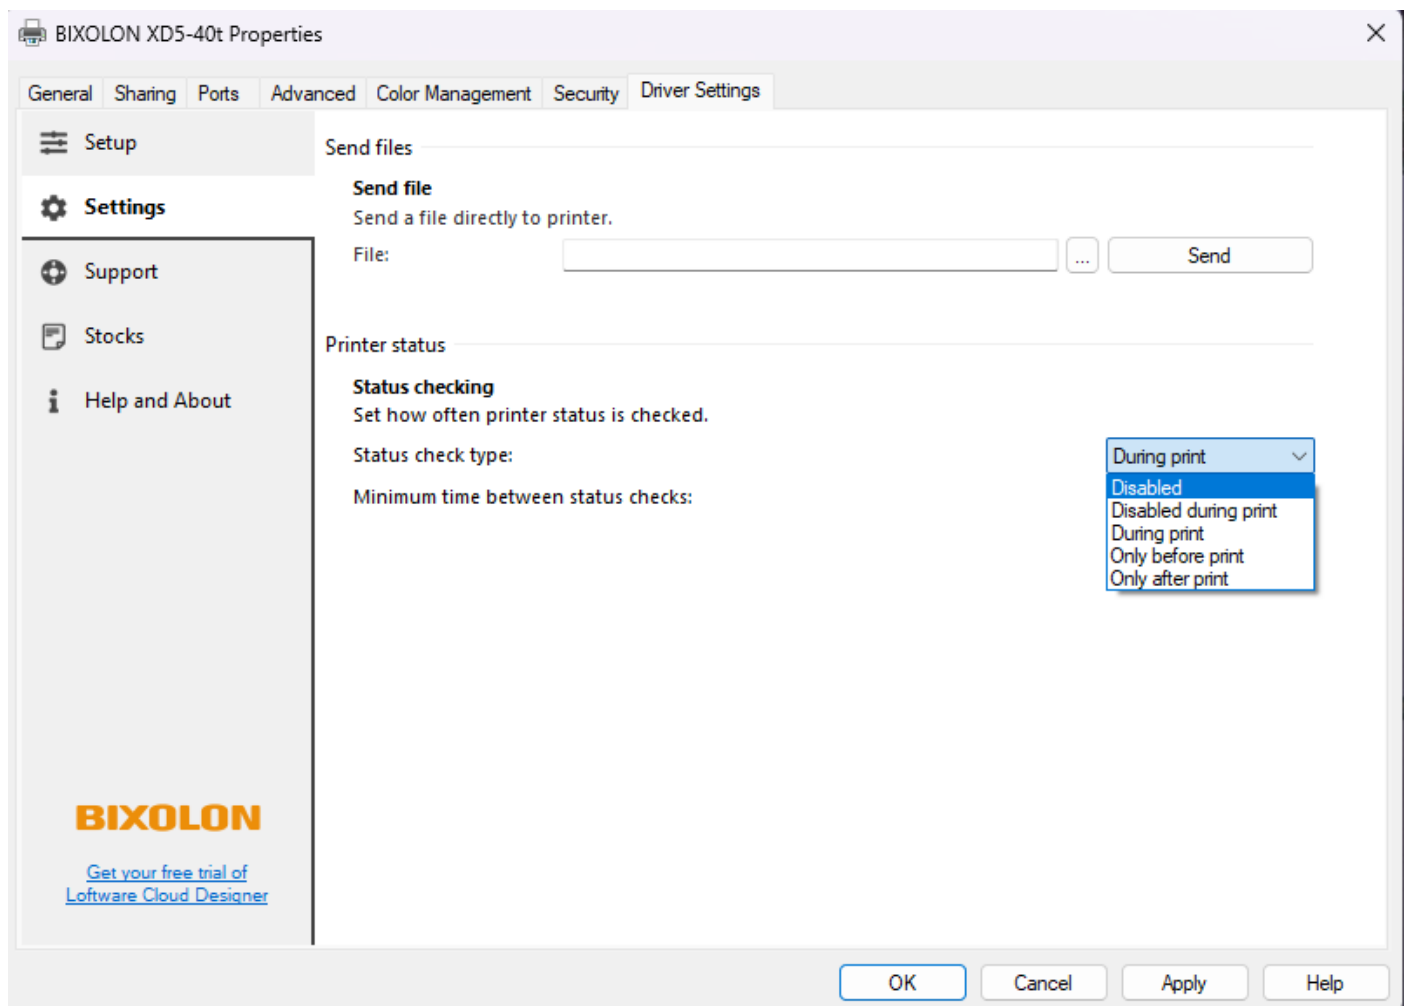


Since this feature may affect continuous printing performance, we recommend setting it to **“Disabled”** if print speed is critical.

3. Logging Feature

This is a new feature introduced in V10.

You can enable or disable logging via:

Printer Properties → Driver Settings → Support → Stream Logging → Enable

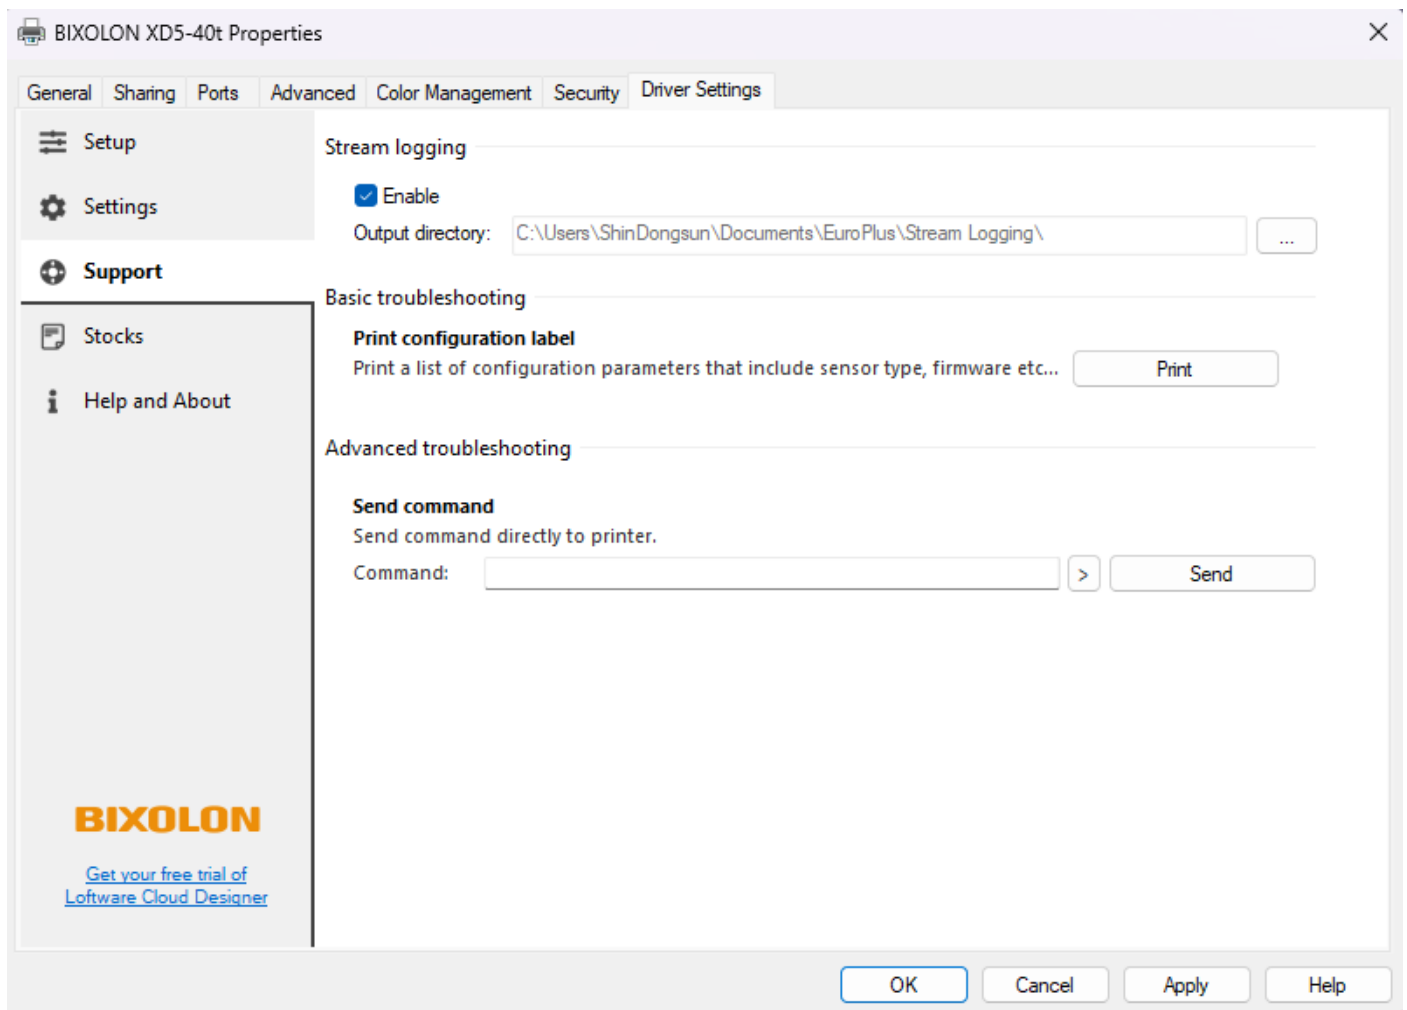

4. Send File Feature

This is a new feature introduced in V10.

You can send a file via:

Printer Properties → Driver Settings → Settings → Send File → “...” button

This feature sends data **directly to the printer without using the driver spooler**.

